



LUMINOUS HEATER RI



- ✓ Exceptional heating comfort even with high hanging height
- ✓ Extended operating life
- ✓ Installation simple
- ✓ Lightweight and powerful appliances
- ✓ Double speed option
- ✓ Ionisation safety system

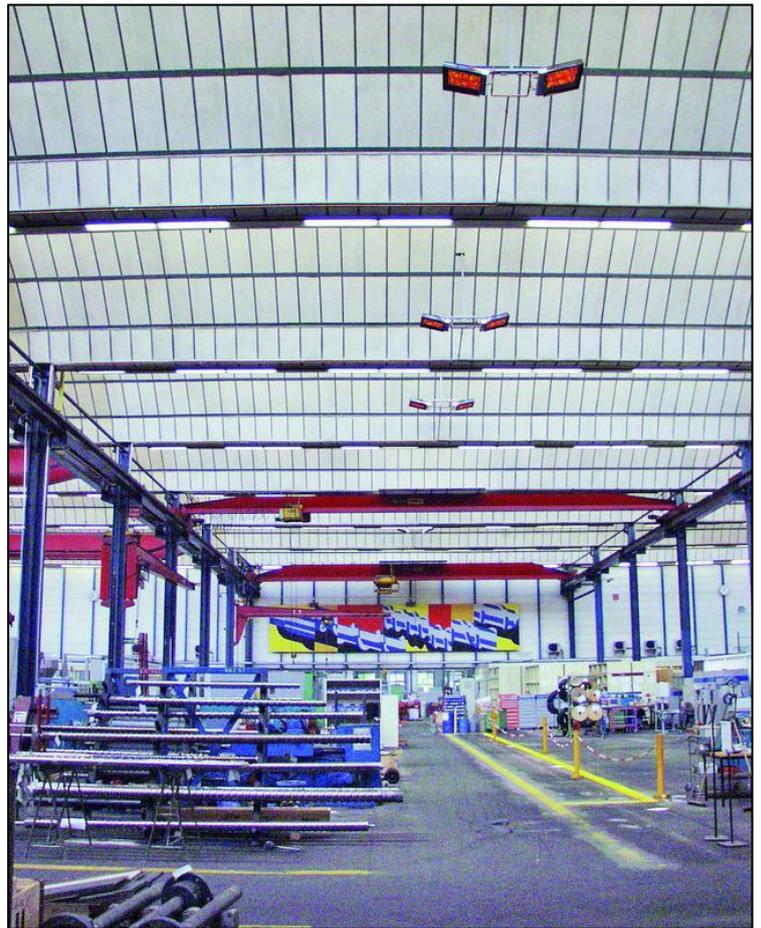


OPERATION AND BENEFITS

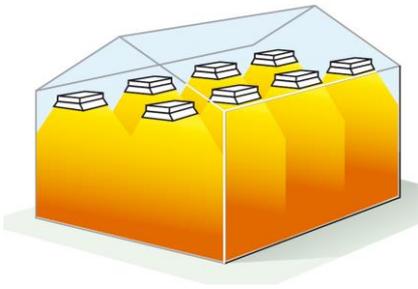


Infrared heating solution brings **comfort** directly to the end users level and limiting heat losses then generating **energy savings**.
The SBM solution is efficient even for not insulated buildings with height from **4 to 25 m** or **outdoor heating**.

DIMENSIONS


RI 12 and RI 16

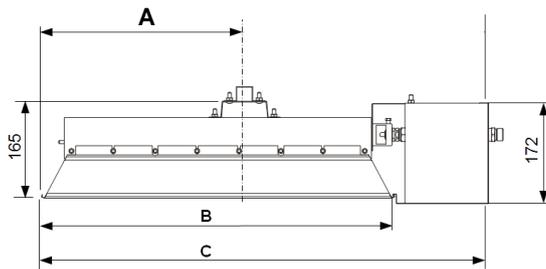


RI 12 and RI 16

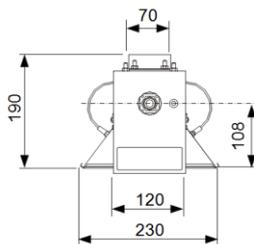

RI 24 and RI 32

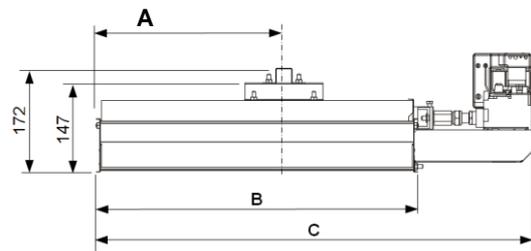

RI 24 and RI 32

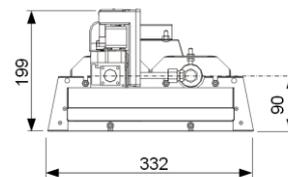

TECHNICAL DATA

MODEL	RI 12	RI 16	RI 24	RI 32
Heat input with Natural gas (MJ/h)	15.0	23.0	30.0	46.0
Heat input with LPG (MJ/h)	18.4	24.3	36.8	48.6
GAS				
Number of burner(s)	1	1	2	2
Inlet gas pressure with Natural gas (kPa)	1.13			
Inlet gas pressure with LPG (kPa)	2.75			
ELECTRICITY				
Electrical supply	230V (+10% - 15%) – 50Hz			
Electrical consumption* (VA)	19	19	19	19
DIMENSIONS				
Weight (kg)	3,9	4,4	6,1	7,3
A (mm)	235	343	206	313
B (mm)	469	596	411	536
C (mm)	630	755	606	731

*Nominal electrical consumption

AGA certificate number: AGA 7278G

NOx class emissions: 4 (<100 mg/kWh)

